


MAX-VALVE™

UNIVERSAL AIR
SUSPENSION
HEIGHT
CONTROL
VALVE



MAX-VALVE™ UNIVERSAL HEIGHT CONTROL VALVE IS DESIGNED TO REPLACE A MULTITUDE OF HEIGHT CONTROL VALVES.

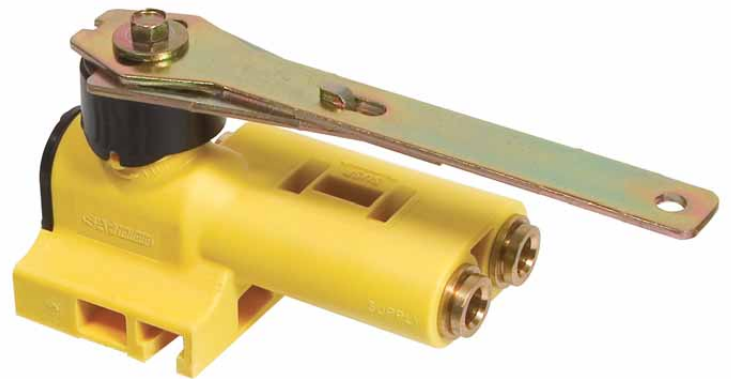

UNIVERSAL NON-DUMP HEIGHT CONTROL VALVE



UNIVERSAL DUMP HEIGHT CONTROL VALVE

MAXIMUM INTERCHANGEABILITY

The MAX-VALVE replaces most height control valves on the market.

The 90 degree push connect fittings and several length control arms included in every kit, allows the MAX-VALVE to replace Height control valves on SAFHOLLAND and competitive suspensions.

Unique universal mounting system allows the MAX-VALVE to fit most mounting plates without drilling holes.

The valve can be mounted vertically or horizontally.

MAXIMUM RELIABILITY

The MAX-VALVE has been tested and proven in the market. We are so confident you will be satisfied that we are offering a 2 year warranty.

The simple design and durability of material combine to provide a world class quality product with reliable performance.

MAXIMUM COST SAVINGS

Stocking the MAX-VALVE will reduce excessive inventory of other one-fit valves. The quick connect fittings and unique 90° adapter fittings save time and money during installation.

Economically priced, making the MAX-VALVE a logical choice.

UNIVERSAL PRESSURE DUMP HEIGHT CONTROL VALVE KIT



PART NUMBER **50860002**

DESCRIPTION

Normal truck and trailer flow. Includes levers, mounting hardware, three 90° PTC elbows and one 90° 1/4" PTC elbow.



UNIVERSAL ZERO PRESSURE DUMP HEIGHT CONTROL VALVE KIT - Normal Flow




PART NUMBER **50860003**

DESCRIPTION

Normal truck and trailer flow. Includes levers, mounting hardware, four 90° PTC elbows.



UNIVERSAL ZERO PRESSURE DUMP HEIGHT CONTROL VALVE KIT - Low Flow

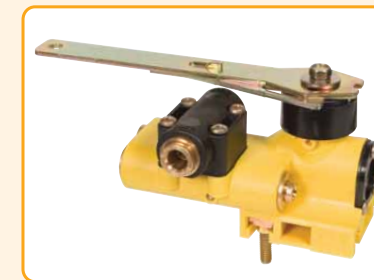

PART NUMBER **50860004**

DESCRIPTION

SAF-HOLLAND low-flow dump. Includes levers, mounting hardware, four 90° PTC elbows.



UNIVERSAL NON-DUMP HEIGHT CONTROL VALVE KIT



PART NUMBER **50860001**

DESCRIPTION

Normal truck and trailer flow. Includes levers, mounting hardware and three 90° 3/8" PTC elbow fittings.



CONVERSION KIT: 3/8" TO 1/4"



PART NUMBER **50860005**

DESCRIPTION

Converts 3/8" ports to accept 1/4" line. Includes four 3/8" stem to 1/4" 90° PTC fitting.

UNIVERSAL LINKAGE KIT



PART NUMBER **50860006**

DESCRIPTION

Universal linkage kit fits all MAX valves and all applications.

MOUNTING OPTIONS

THE MAX-VALVE™ IS BUILT TO BE USED IN MULTIPLE MOUNTING CONFIGURATIONS TO MAXIMIZE YOUR APPLICATION POSSIBILITIES.


VALVE MOUNTING LEVER CONFIGURATIONS

The Max-Valve lever can be mounted in four positions.



VALVE MOUNTING BOLTS


The unique slide-in mounting bolts allows the Max-Valve to be mounted with the bolts diagonal, horizontal, or vertical.

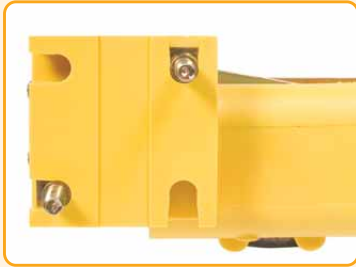

Diagonal




Horizontal

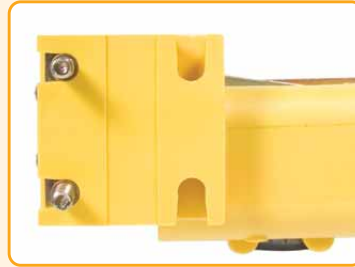


Vertical

VALVE MOUNTING

The valve itself can be mounted either horizontal or vertical, whichever fits your application the easiest.

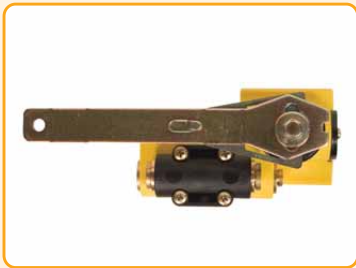

Horizontal

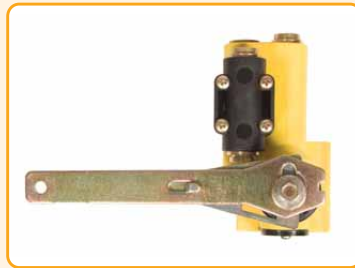

Vertical

XL-AC10005SL-en-US Rev D · 2011-04-016 · Amendments and Errors Reserved © SAF-HOLLAND, Inc.

SAF-HOLLAND USA, Inc.
888.396.6501 Fax 800.356.3929

www.safholland.us

